



SRM INDUSTRIES INC.



The Toughest Hose Protection Products on the Planet...Period!

RHINO SLEEVE® HT

**Toughest Hose Protection...
Anything Else is a Compromise**



PART #	Min. Inside Dia.		Max. Inside Dia.	
	In.	Mm.	In.	Mm.
RS-68HT	0.68	17	0.84	21
RS-79HT	0.79	20	0.95	24
RS-91HT	0.91	23	1.03	26
RS-98HT	0.98	25	1.10	28
RS-106HT	1.06	27	1.18	30
RS-122HT	1.22	31	1.34	34
RS-142HT	1.42	36	1.54	39
RS-157HT	1.57	40	1.73	44
RS-163HT	1.63	41	1.79	45
RS-173HT	1.73	44	1.89	48
RS-185HT	1.85	47	2.01	51
RS-209HT	2.09	53	2.25	57
RS-219HT	2.19	55	2.35	60
RS-238HT	2.38	60	2.54	65
RS-262HT	2.62	66	2.78	70
RS-288HT	2.88	73	3.04	77
RS-315HT	3.15	80	3.31	84
RS-366HT	3.66	93	3.82	97
RS-394HT	3.94	100	4.10	105
RS-441HT	4.41	112	4.57	116
RS-494HT	4.94	125	5.10	130
RS-550HT	5.50	140	5.66	144

Material Specifications

- Melting Point:** 480°F/248°C
- Denier:** 1300
- Material:** Proprietary Engineered Fabric
- Dim. Stability:** Great resistance to sun, atmospheric agents and aging
- Toxicity:** Non-Toxic

Features & Benefits

- Meets new line of sight operator specification EN982 ISO norm 833 EN414
- Meets Australian MDG41 specifications for mining applications
- Ultra tight construction contains oil spillage from pin hole leaks
- Tight, smooth surface to resist water
- 50% less bulky than Cordura
- Densely twisted proprietary engineered fabric offers optimum UV & abrasion protection
- MSHA# IC-234/1
- Meets abrasion standard ISO 6945
- Meets Fed-STD191-Test Method 5309 for abrasion
- Meets ASTM D6770 for abrasion resistance of textile webbing
- Meets conductivity requirements of ISO 8031
- Cut to length

See Cross Reference Chart on page 24

Sold in 300FT (91.44 Meters) Rolls
Standard Roll is 3 pieces maximum

Manufactured in the USA for SRM Industries Inc.





SRM INDUSTRIES INC.




The Toughest Hose Protection Products on the Planet...Period!

RHINO SLEEVE® HT

Chemical Compatibility

Gasoline	Very Good
Oil	Very Good
Mineral & Vegetable Oil	Very Good
Ionic Metallic Solutions	Very Good
Alcohols	Very Good
Diluted Bases	Very Good
Diluted Acids	Good
Benzene	Very Good
Acetone	Very Good
Ether	Very Good
Carbon Tetrachloride	Very Good
Chlorine Based Solvents	Very Good
Mold, Bacteria, Moths	Very Good
Strong & Concentrated Acids	May Have Some Corrosive Action

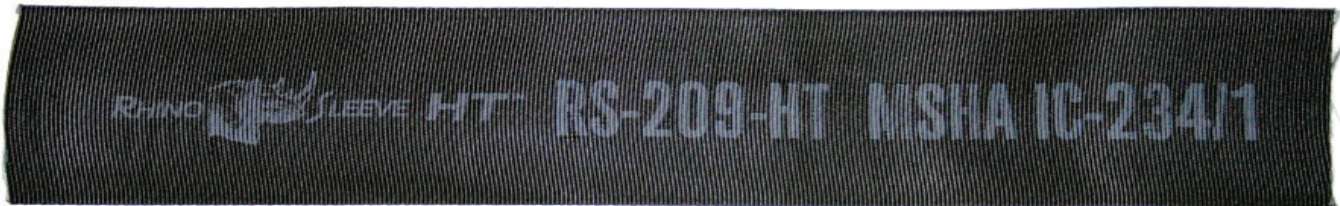



SRM INDUSTRIES INC.



The Toughest Hose Protection Products on the Planet...Period!

RHINO SLEEVE® HT

CROSS REFERENCE CHART

RHINO SLEEVE HT P/N	RHINO SLEEVE RD I.D.		Gates P/N	Gates RD I.D. Inches	Aeroquip P/N: FC-	Aeroquip RD I.D. Inches	WeatherHead P/N	WeatherHead RD I.D. Inches	Parker P/N	Parker RD I.D. Inches	RHINO SLEEVE RD I.D.		RHINO SLEEVE HT P/N
	In.	Mm.									In.	Mm.	
RS-68HT	0.68	17	HG10	.68					AS-B-11	0.69	0.68	17	RS-68HT
					425-12	0.71							
RS-79HT	0.79	20									0.79	20	RS-79HT
									AS-B-13 & PS-B-13	0.86			
RS-91HT	0.91	23	HG14	.90	425-15	0.92	A4900	0.90			0.91	23	RS-91HT
RS-98HT	0.98	25			425-16	1.00					0.98	25	RS-98HT
RS-106HT	1.06	27	HG16	1.06			A4901	1.06	AS-B-15 & PS-B-15	1.06	1.06	27	RS-106HT
					425-18	1.13							
RS-122HT	1.22	31	HG20	1.22	425-20	1.25	A4902	1.22	AS-B-17 & PS-B-17	1.22	1.22	31	RS-122HT
							A4903	1.35	AS-B-19	1.35			
RS-142HT	1.42	36	HG24	1.42					AS-B-22 & PS-B-22	1.42	1.42	36	RS-142HT
RS-157HT	1.57	40			425-24	1.59					1.57	40	RS-157HT
RS-163HT	1.63	41					A4904	1.66	AS-B-27	1.63	1.63	41	RS-163HT
RS-173HT	1.73	44			425-28	1.75					1.73	44	RS-173HT
RS-185HT	1.85	47	HG28	1.81			A4905	1.81	AS-B-33 & PS-B-33	1.81	1.85	47	RS-185HT
RS-209HT	2.09	53			425-32	2.07					2.09	53	RS-209HT
RS-219HT	2.19	55	HG32	2.19			A4906	2.19	PS-B-35	2.19	2.19	55	RS-219HT
RS-238HT	2.38	60	HG38	2.38	425-38	2.38			AS-B-37 & PS-B-37	2.38	2.38	60	RS-238HT
					425-40	2.54							
RS-262HT	2.62	66	HG42	2.62			A4907	2.62	PS-B-39	2.63	2.62	66	RS-262HT
							A4908	2.80					
RS-288HT	2.88	73	HG46	2.88	425-46	2.86			PS-B-45	2.88	2.88	73	RS-288HT
RS-315HT	3.15	80							PS-B-47	3.13	3.15	80	RS-315HT
RS-366HT	3.66	93			425-59	3.66			AS-B-58	3.63	3.66	93	RS-366HT
RS-394HT	3.94	100							AS-B-64	4.00	3.94	100	RS-394HT
RS-441HT	4.41	112	HG64	4.40						4.41	4.41	112	RS-441HT
RS-494HT	4.94	125								4.94	4.94	125	RS-494HT
RS-550HT	5.50	140								5.50	5.50	140	RS-550HT