



SRM INDUSTRIES INC.




The Toughest Hose Protection Products on the Planet...Period!

RHINO WRAP™ RXX

RHINO WRAP EXTRA TOUGH THE ULTIMATE ABRASION RESISTANT SLEEVE

RHINO WRAP™ RXX is a heavy-duty product with a unique, high lubricity coating with similar wear characteristic to "tough cover" hose products. **RHINO WRAP™ RXX** is constructed using Military Spec 1500 denier woven hybrid fabric with an 83-durometer coating. This results in a product which offers the best abrasion wrap choice available today.

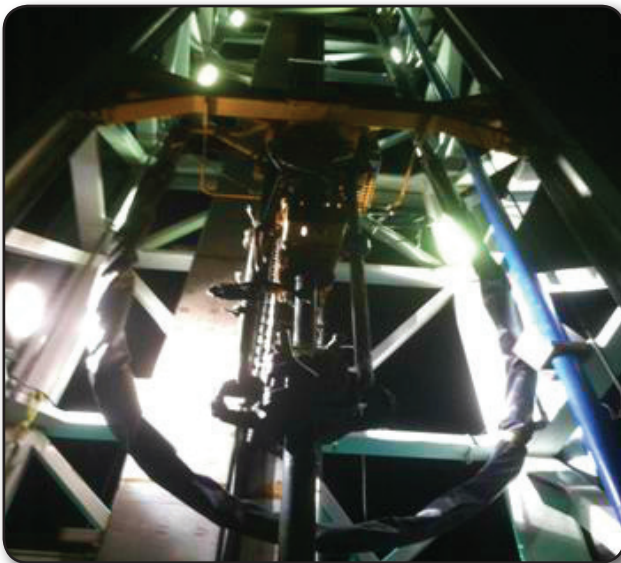

(Oil Rig application in West Texas)


FEATURES & BENEFITS

RHINO WRAP™ RXX has nearly twice the mass and four to six times the abrasion resistance of our other **RHINO WRAP** products. **RHINO WRAP™ RXX** has the most enhanced wear reinforcement areas for extreme duty requirements.

Hoses in static positions also benefit from using **RHINO WRAP™ RXX** to minimize vibration due to pumping flow, abrasion from moving hoses, and hose damage from cover contact. **RHINO WRAP™ RXX** can prevent accidental damage and protect operators from unshielded hose failure.

RHINO WRAP™ RXX is reusable and features Mil-Spec Heavy-Duty hook and loop closures, which allows for installation without disconnecting hoses and can reduce labor time by 70%.

Testing on the **RHINO WRAP™ RXX** (see picture below) is an example from a drag test performed in a subsea application.

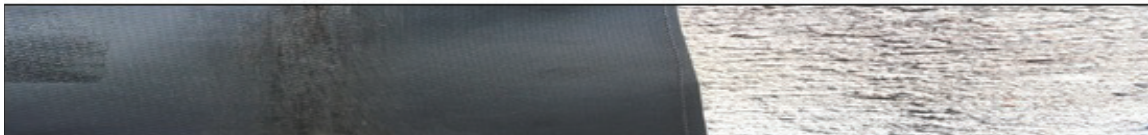

The most challenging part of the job comes from dragging the heavy 600 ft. bundle, (which equals 40psi ground pressure) over rough concrete, on to the dock, during inspection and storage preparation. With the force and weights involved in oil and gas industry applications, along with the extremely high cost of down time, **RHINO WRAP™ RXX** is the recommended product for you to spec in for your extreme applications.

Manufactured in the USA for SRM Industries Inc.





SRM INDUSTRIES INC.



The Toughest Hose Protection Products on the Planet...Period!

RHINO WRAP™ RXX

RHINO WRAP EXTRA TOUGH THE ULTIMATE ABRASION RESISTANT SLEEVE

Designed to handle extreme applications.

Some applications for **RXX** are:

- Oil Field Industry
 - Frac Hoses
 - Rotary Hoses
 - Drill Rigs
 - Dock Hoses
- Forestry Industry



Tested 5 times tougher than any other sleeve

- Material:** Proprietary Engineered fabric
- Temperature Range:** -60° F to 250° F; (-51°C to +121°C)
- Abrasion:** Excellent; Meets ISO 6945 Specifications
- Puncture / Tear:** Excellent; very puncture and tear resistant
- UV Protection:** Excellent; Meets EN13758-1
- Chemicals:** Excellent; resistant to water and petroleum
- Wicking:** Excellent; sheds surface moisture
- Welding Sparks / Spall:** Excellent



- Meets RoHS
- This product can expose you to chemicals including toluene diisocyanate (TDI), which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov

Manufactured in the USA for SRM Industries Inc.

Note: We reserve the right to make any engineering or material changes at any time to our products for enhancement, performance and quality.

Proper use of product is the sole responsibility of the user.

SRM Part Number	Wrap Inside Diameter		Wrap Flat Width	
	In.	Mm.	In.	Mm.
RW-1.75RXX	1.75	44.45	7.00	177.80
RW-2.00RXX	2.00	50.80	7.78	197.61
RW-2.38RXX	2.38	60.45	8.97	227.84
RW-2.50RXX	2.50	63.50	9.35	237.49
RW-2.75RXX	2.75	69.85	10.14	257.56
RW-3.00RXX	3.00	76.20	10.92	277.37
RW-3.25RXX	3.25	82.55	11.71	297.43
RW-3.50RXX	3.50	88.90	12.49	317.25
RW-4.00RXX	4.00	101.60	14.06	357.12
RW-4.50RXX	4.50	114.30	15.63	397.00
RW-5.00RXX	5.99	127.00	17.20	436.88
RW-6.00RXX*	6.00	152.40	20.34	516.64
RW-7.00RXX	7.00	177.80	23.48	597.39
RW-8.00RXX	8.00	203.20	26.62	676.15
RW-9.00RXX	9.00	228.60	29.77	756.16
RW-9.50RXX	9.50	241.30	31.34	796.04
RW-10.00RXX	10.00	254.00	32.91	835.91
RW-11.00RXX	11.00	279.40	35.85	910.59
RW-12.00RXX	12.00	304.80	39.19	995.43
RW-13.00RXX	13.00	330.20	42.34	1075.44
RW-13.50RXX	13.50	342.90	43.91	1115.31
RW-14.50RXX	14.50	368.30	47.05	1195.07
RW-15.00RXX	15.00	381.00	48.62	1234.95
RW-16.00RXX	16.00	406.40	51.76	1314.70

*Stock Size: RW-6.00RXX All other sizes are Made to Order and require a Minimum order of One (1) 75 Ft. / 22.86 Meter roll per size